

NEW



Double & Triple Links

TECHNOLOGY · INNOVATION · QUALITY · VALUE


Double & Triple Links

For the toughest applications

4B double and triple links are forged with the same quality, strength and durability as our standard drop forged chain links.

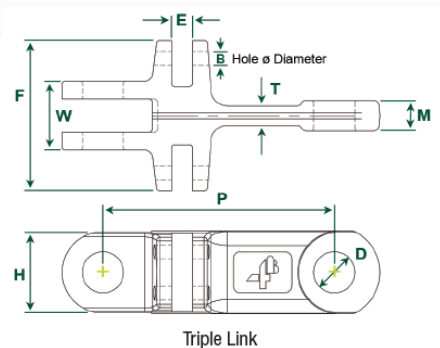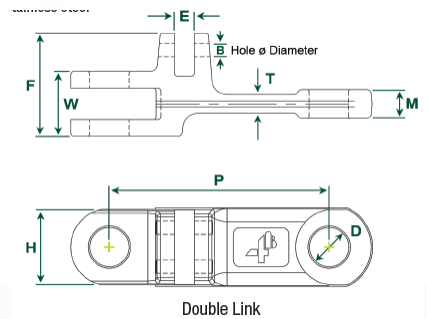

Triple Configuration



Chain Link	4B142DNA	4B142DHA	4B142TNA	4B142THA	4B175DNA
Minimum Breaking Load	300 kn 67,500 lb	450 kn 101,000 lb	300 kn 67,500 lb	450 kn 101,500 lb	500 kn 113,000 lb
Case Hardness	Rockwell C57	Rockwell C57	Rockwell C57	Rockwell C57	Rockwell C57
Case Depth	0.7 mm	0.7 mm	0.7 mm	0.7 mm	1.0 mm
Core Hardness	Rockwell C40	Rockwell C40	Rockwell C40	Rockwell C40	Rockwell C40
Weight (Per Link)	1.37 kg	2.00 kg	1.67 kg	2.32 kg	3.17 kg
Bolt 'N' Go Compatible	No	No	No	No	No
Dimensions					
F	67 mm	87 mm	92 mm	112 mm	96 mm
W	42 mm	62 mm	42 mm	62 mm	72 mm
E	13 mm	13 mm	13 mm	13 mm	17 mm
T	12 mm	16 mm	12 mm	16 mm	16 mm
M	18.7 mm	28 mm	18.7 mm	28.5 mm	22 mm
H	50 mm	50 mm	50 mm	49 mm	60 mm
P	142 mm	142 mm	142 mm	142 mm	175 mm
D	25 mm	25 mm	25 mm	25 mm	30 mm
B	8.5 mm	8.5 mm	8.5 mm	8.5 mm	10.5 mm

Information subject to change or correction. September 2009.